


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: 4.0 to 8.0 GHz
- 1.2 FREQ. SENSITIVITY: ±0.75dB
- 1.3 COUPLING: SEE TABLE
- 1.4 VSWR (MAX): 1.30:1
- 1.5 INSERTION LOSS (EXC. COUPLED POWER): 0.50dB MAX.
- 1.6 DIRECTIVITY: 18dB MIN.
- 1.7 POWER: SEE TABLE
- 1.8 RF IMPEDANCE: 50 OHMS
- 1.9 WEIGHT (MAX.): 6.8 oz.


- 2.0 FINISHING:
- 2.1 GREY OVER MIL-E-15090 TYPE II, CLASS 2 OVER MIL-C-5541 CLASS 3A MEETS MIL-F-14072 MEETS MIL-E-5400 AND MIL-E-16400V.
- 2.2 MARK UNIT AS SHOWN. (REF.: SLK-08139-82-[12-15])

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

CPL-5214-30-TNC-79	30dB	50	50	4,000
CPL-5214-20-TNC-79	20dB	50	50	4,000
CPL-5214-10-TNC-79	10dB	50	10	4,000
CPL-5214-06-TNC-79	6dB	50	4	4,000
CPL-5214-XX-TNC-79 MODEL NUMBER	-XX ±1.0dB COUPLING	INPUT POWER (WATTS)	REF.	PEAK

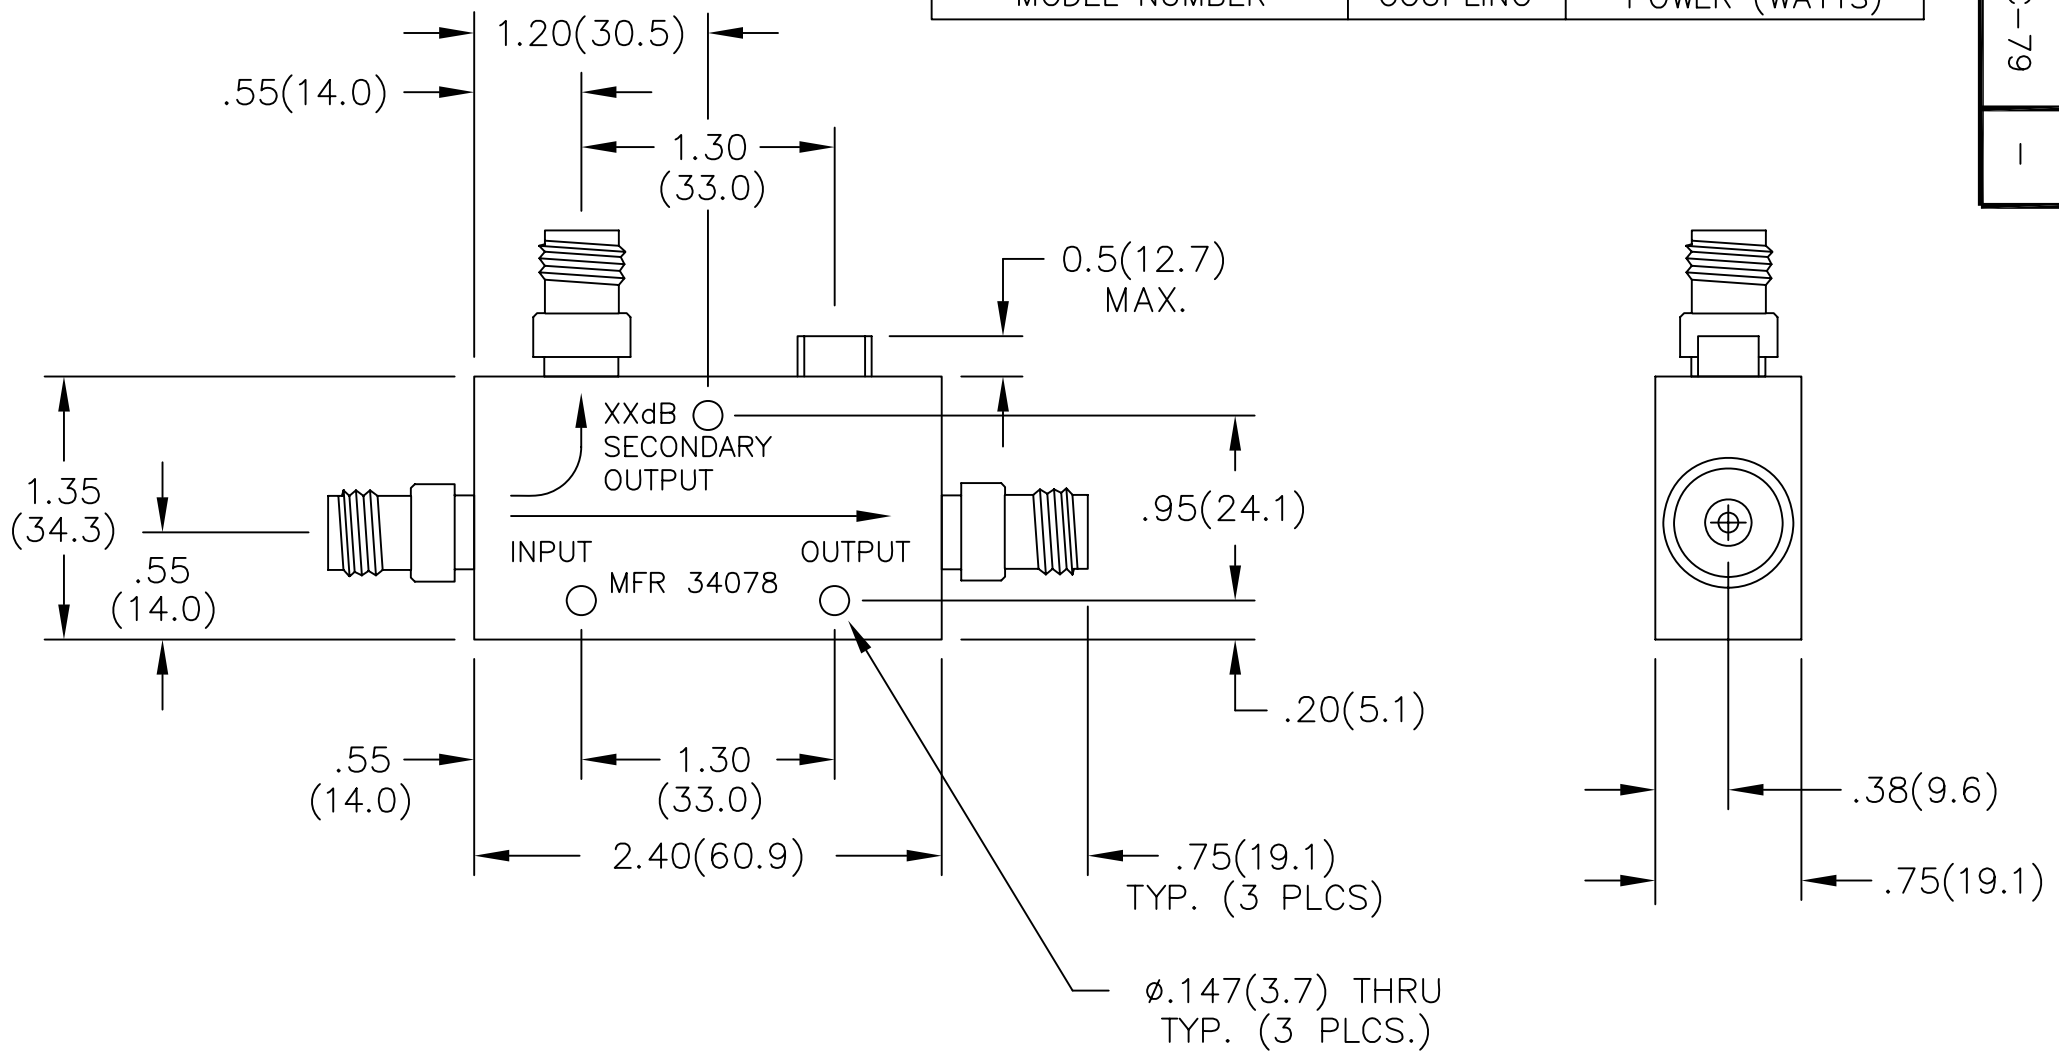

TYPE TNCA JACK  
INTERFACE PER  
MIL-STD-348A  
FIG. 313-44  
(INTERFACE ALSO  
MEETS TYPE TNC  
18 GHz, GRADE 1  
PER IEC 169-26,  
FIG 2) TYP.  
(3 PLCS.)

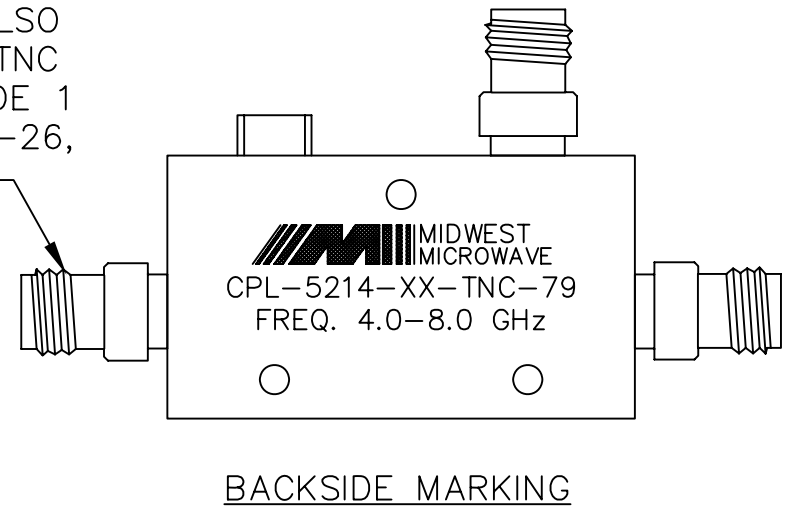

BACKSIDE MARKING

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  
3 PLACE DECIMALS ±.005  
2 PLACE DECIMALS ±.02  
FRACTIONS ±1/64  
PARALLELITY: T.I.R. \_\_\_\_\_  
FLATNESS: T.I.R. \_\_\_\_\_  
CONCENTRICITY: T.I.R. \_\_\_\_\_  
ANGLES AND PERPENDICULARITY: ±1°

FSCM NO.  
**34078**

**MIDWEST MICROWAVE**

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave

TITLE  
DIRECTIONAL COUPLER

DRAWN/DATE  
S.ORLOV  
5/9/06

ENG./DATE  
R.HALL  
5/9/06

DRAWING NUMBER  
CPL-5214-XX-TNC-79

CHECKED/DATE

APPROVED/DATE

SCALE: 1=1 SHEET 1 of 1

DATE	5/9/06
DESCRIPTION	RELEASED
REV.	1