

# Double icon illuminated pushbuttons - bushing $\emptyset$ 24 or 26 mm - momentary or latching

Distinctive features and specifications

FD1705A-R1





- Double icon actuator
- ☐ Snap-in and threaded bushing models
- ☐ Suited for integrated designs
- ☐ Large but lightweight
- ☐ Sealed to IP69K (threaded bushing version)

## **ELECTRICAL SPECIFICATIONS**

- Max. current/voltage rating with resistive load :
  - silver contacts (code 2): 4A 12VDC
  - gold plated contacts (code 4): 200mA 12VDC
- Initial contact resistance : 50 m $\Omega$  max.
- Insulation resistance : 1  $G\Omega$  min. at 500VDC
- Dielectric strength: 1.000 Vrms 50 Hz min.
  Electrical life at full load:
- - Momentary models: 1 million cycles (gold plated contacts) 400.000 cycles (silver contacts)
  - Latching models: 200.000 cycles


## **GENERAL SPECIFICATIONS**

- Front panel sealing:

  - Threaded bushing version: IP69K according to DIN 40050-9
     Snap-in version: IP54 according to IEC 60529 with panel gasket and 2 mm panel thickness
- Panel thickness :
  - Snap-in version: 1,5 (.059) to 2 mm (.078) with panel gasket 2 (.078) to 2,5 mm (.885) without panel gasket
  - Threaded bushing version :1(.039) to 18 mm (.708) max.
- Total travel : 2,5 mm ± 0,5 mm
- Typical operating force: 8N ± 2N
  Low level or mechanical life:
- - Momentary models : 1 million cycles
- Latching models: 200.000 cycles
- Torque : 3 Nm max. applied to nut
- Operating temperature: -40°C to +75°C

## **MATERIALS**


- Case : PA46
- Actuator: PA12
- Bushing/bezel: PA66
- Contacts: silver (code 2) or silver, gold plated (code 4)

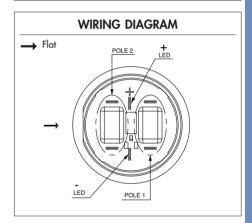



# Double icon illuminated pushbuttons - bushing Ø 24 or 26 mm - momentary or latching

**Overview** 

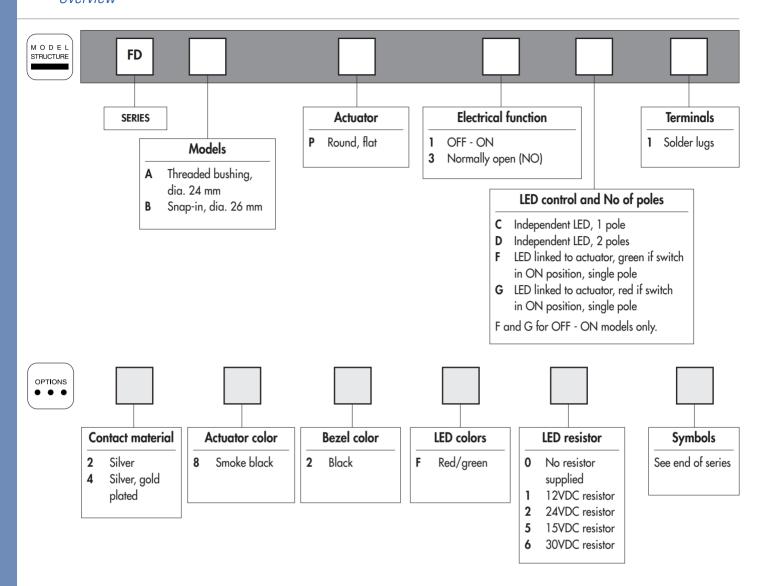

#### **ABOUT THIS SERIES**

On the following pages, you will find successively: model structure of switches and options in the same order as in above chart

**Dimensions:** first dimensions are in mm while inches are shown as bracketed numbers.



NOTICE: please note that not all combinations of above numbers are available. Refer to the following pages for further information.



Mounting accessories: Standard hardware supplied: 1 hex nut (threaded bushing version) and 1 panel gasket




Packaging unit: 20 pieces

2 www.apem.com APEM



# Double icon illuminated pushbuttons - bushing $\emptyset$ 24 or 26 mm - momentary or latching

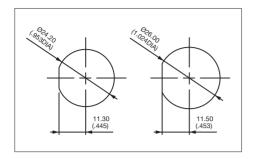



- Solder lugs
- Flat actuator

To order a product, replace • with one of the codes selected under "LED control and number of poles" below, then add the desired options.





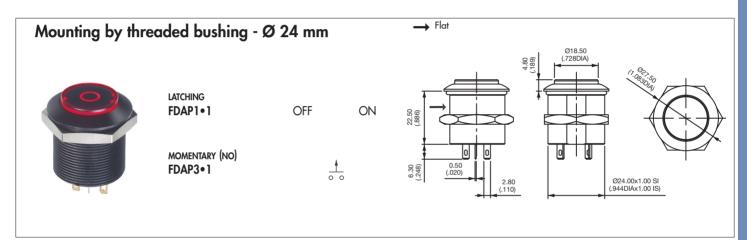

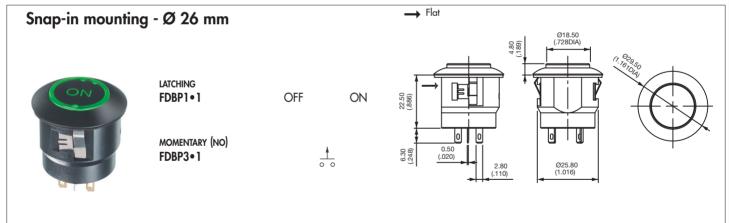

## LED CONTROL AND NUMBER OF POLES

Complete the model numbers above with one of the following codes.

|  | Function 1 (latching) | Function 3 (momentary)   |
|--|-----------------------|--------------------------|
| Independent LED single pole                | +   0   0   -         | + 10 01                  |
| Independent LED<br>double pole<br><b>D</b> | + 10/10-01-           | + Lo 1 - Lo o 1 - Lo o 1 |

|  | Function 1 (latching) |
|--|-----------------------|
| Green LED in ON position single pole                 | + 1000                |
| Red LED<br>in ON position<br>single pole<br><b>G</b> | +                     |


dotted line = jumper to be wired by the user. LED- has to be wired to one pin of pole 2.

# FD series

# Double icon illuminated pushbuttons - bushing $\emptyset$ 24 or 26 mm - momentary or latching

**Options** 



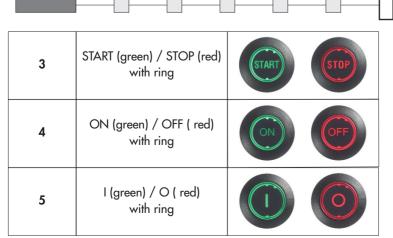



4 www.apem.com APEM